




SE-200



2700K 4.8W/m (1.46W/ft) 639lm/m (195lm/ft)	3000K 4.8W/m (1.46W/ft) 642lm/m (196lm/ft)	4000K 4.8W/m (1.46W/ft) 646lm/m (197lm/ft)	6500K 4.8W/m (1.46W/ft) 668lm/m (204lm/ft)
2300K 4.8W/m (1.46W/ft) 600lm/m (183lm/ft)	3500K 4.8W/m (1.46W/ft) 640lm/m (195lm/ft)	5000K 4.8W/m (1.46W/ft) 650lm/m (198lm/ft)	

The SE Series from Southern State Lighting is an Ultra-high efficiency side-emitting flexible lighting solution designed for architectural, commercial, and high-end residential applications. This is an 8mm wide body. High color rendering and extreme flexibility make this an excellent solution for tight bends and unique mounting applications.


Catalog Nomenclature:

Series	Output	Color Temp	IP Rating
SE	200	(CCT)	IP20


Body Width:	8mm	Input Voltage:	24VDC
Wattage/Ft:	1.46W	Beam Angle:	120 Degrees
Lumens/Ft:	183-204lm/ft	Max Run Length:	40ft (In Series)
CCT's:	2300K,2700K*, 3000K*, 3500K*, 4000K,5000K, 6000K	Bin Sorting:	Single Bin
CRI:	90+	Bin Consistency:	3-Step MacAdam Ellipse
Cut Interval:	3.94" (100mm)	Driver Type:	Constant Voltage
IP Rating:	IP20	Dimming Capability:	0% With Compatible Driver
Rated Life:	L70>50,000 Hours	Certifications:	UL, CE, ROHS




Triac dimming

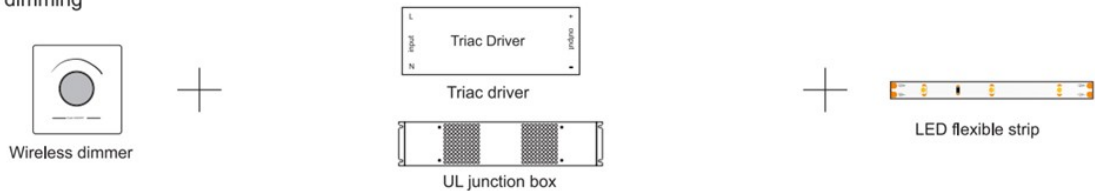

0-10V dimming

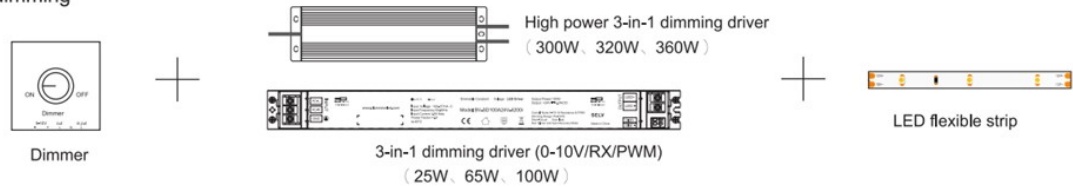

Smart dimming

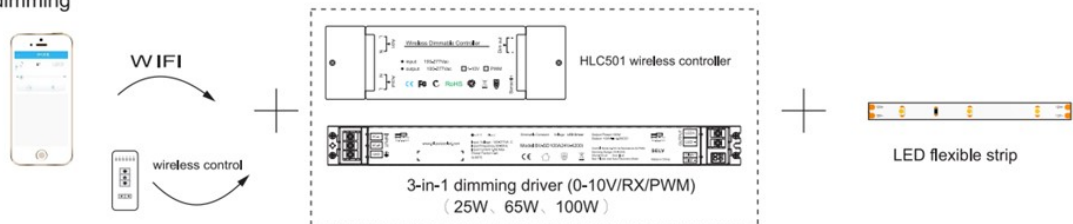



Applications

